


# Instructions – Control Unit

The control unit for switching blaugelb Roller Shutter Motors of the COMFORT series in groups.



Operating voltage:	230 V/50 Hz
Power consumption:	10 mA (relay)
Switching capacity:	max. 2 A, 250 VAC
Motor load:	max. 750 VA (only 230 V motors with limit switching)
Operating temperature:	0 °C to +60 °C
Screw terminals:	1.5 to 2.5 mm <sup>2</sup>
Dimensions:	51 x 47 x 20 mm (HxWxD)

Connection diagram for **two** roller shutter motors

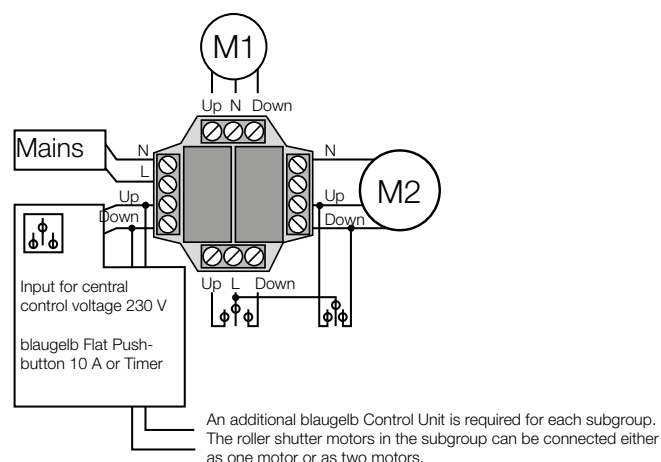

The connection may only be carried out by an electrician.

Product name	PU	Item no.
blaugelb Control Unit 230 V / 50 Hz	1 piece	9084811

## Connection:

The blaugelb Control Unit can be operated with either one or two shutter motors. The connection differs depending on the type of use.

Connection diagram for **one** roller shutter motor

